

Electronic pressure switches

ATM/GR



Version: 28.03.2012

Technical Specifications

Pressure measuring range (bar)

	0.1 ... 0.5, (1)	> 0.5 ... 2	> 2 ... 25
Overpressure	3 bar	3 x FS (min. 3 bar)	3 x FS
Burst pressure	> 200 bar	> 200 bar	> 200 bar
Accuracy, (4), (\pm % FS)	$\leq 0.5 / \leq 0.25$	$\leq 0.5 / \leq 0.25 / \leq 0.1$	$\leq 0.5 / \leq 0.25 / \leq 0.1$
Thermal shift, (\pm % FS/°C)			
Zero point 0...70°C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25...85°C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0...70°C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25...85°C	≤ 0.02	≤ 0.02	≤ 0.02
Long term stability, (5)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

	> 25 ... 600, (2), (3)	> 600 ... 1000, (2)
Overpressure	3 x FS ($\leq 850 / \leq 1500$ bar)	1500 bar
Burst pressure	> 850 / ≤ 1500 bar	> 1500 bar
Accuracy, (4), (\pm % FS)	$\leq 0.5 / \leq 0.25 / \leq 0.1$	$\leq 1 / \leq 0.5 / \leq 0.25$
Thermal shift, (\pm % FS/°C)		
Zero point 0...70°C	≤ 0.015	≤ 0.015
Zero point -25...85°C	≤ 0.02	≤ 0.02
Span 0...70°C	≤ 0.015	≤ 0.015
Span -25...85°C	≤ 0.02	≤ 0.02
Long term stability, (5)	< 0.1% FS / < 0.2% FS	< 0.1% FS / < 0.2% FS

(1) 50 mbar on request

(2) Titanium available ≤ 400 bar (burst pressure > 550 bar)

(3) Overpressure and burst pressure 1500 bar (stainless steel) optional

(4) Zero based accuracy according to DIN16086, incl. hysteresis and repeatability at ambient temperature

(5) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature range

Operating temperature	-25...85 °C
Process temperatur	-40...150 °C
Storage temperatur	-25...85 °C

Electrical specifications

Analog output	0...20 / 4...20 mA		
Power supply	10...33 V DC		
Current consumption, (1)	<p>[mA]</p> <p>I_s</p> <p>U_B [V]</p>		
Circuit diagram			
Load resistance	<p>[Ohm]</p> <p>$R_L < \frac{U_B[V] - 6V}{0.02A}$, 1kOhm max</p> <p>$R_L$</p> <p>$U_B$ [V]</p>		
Switches			
Number of switches	2 (independent)		
Type	SPDT (Relais)		
Adjustment	Potentiometer		
Setting range	0...100% FS		
Switching voltage, (max.)	48 V DC		
Switching current, (max.)	2 A		
Switching power, (max.)	60 W		
Switching functions			
Description	Pressure is below both set points: both relais are selected.	Pressure is over the set point 1 (relay 1 is released), but below the set point 2 (relay 2 is selected).	Pressure is over both set points: both relais are released or the supply voltage is missing.

(1) Both switches activated, without current output

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (standard), EPDM, Kalrez
Cable	PVC

(1) Hastelloy (C-276) on request

Equipment

Overview

10.00.0091	Accessories overview
------------	----------------------

Additional documents

Operating and safety instructions


	Article number
10.88.0092	DMM029

Ordering information

	X. XXXX. XXXX. XX. XXX
Type	
ATM/GR	27
Pressure type	
Gauge	1
Absolute (vacuum)	2
Sealed gauge	3
Pressure measuring range	
Any pressure measuring ranges between 0...100 mbar and 0...1000 bar available, (1), (2), (3)	XX
Process connection	
G 1/4 F, (Fig. 1)	00
G 1/4 M, (Fig. 2)	11
G 1/4 M, manometer DIN 16288, (Fig. 3)	12
G 1/2 M, (Fig. 4)	13
G 1/2 M, frontal diaphragm, (Fig. 5)	14
G 1/2 M, flush diaphragm, (Fig. 6)	15
G 1/2 M, manometer DIN 16288, (Fig. 7)	16
1/4 NPT M	10
1/2 NPT M, (Fig. 8)	19
Customized connection available	XX
Electrical connection	
Binder 723, 12-pin, IP 67, (Fig. 10), (4)	45
PVC cable, IP 67, (Fig. 11), (5)	10
Output signal	
0...20 mA	14
4...20 mA	15
Accuracy	
≤ ± 0.5 % FS	0
≤ ± 0.25 % FS	1
≤ ± 0.1 % FS (on request)	2
Temperature range	
0...70 °C compensated (allowed process temperature: 0...80 °C)	0
-25...85 °C compensated (allowed process temperature: -25...100 °C)	1
-25...85 °C compensated (allowed process temperature: -25...150 °C)	2
Option 1	
Throttle, (6)	A
Special oil filling: ASEOL Food (for food applications)	G
Special oil filling: Halocarbon (for oxygen applications), (7), (8)	H
Option 2	
Electronics packed in gel: Gauge pressure	C
Electronics packed in gel: Absolute pressure	D
Option 3	
Version titanium	K
Seals: Viton (standard)	U
Seals: EPDM	S
Seals: Kalrez	T
Aging	Z

- (1) 50 mbar on request
- (2) Titanium available ≤ 400 bar (burst pressure > 550 bar)
- (3) mbar, PSI, kPa etc. available
- (4) Cable socket connector not included
- (5) Please specify the required cable length and medium
- (6) Only with pressure connection Fig. 2, Fig. 3, Fig. 4, Fig. 7 and Fig. 8
- (7) Maximaler Druckmessbereich ≤ 270 bar (Berstdruck > 400 bar)
- (8) min. Medium temperature -25 ° C

Technical drawings

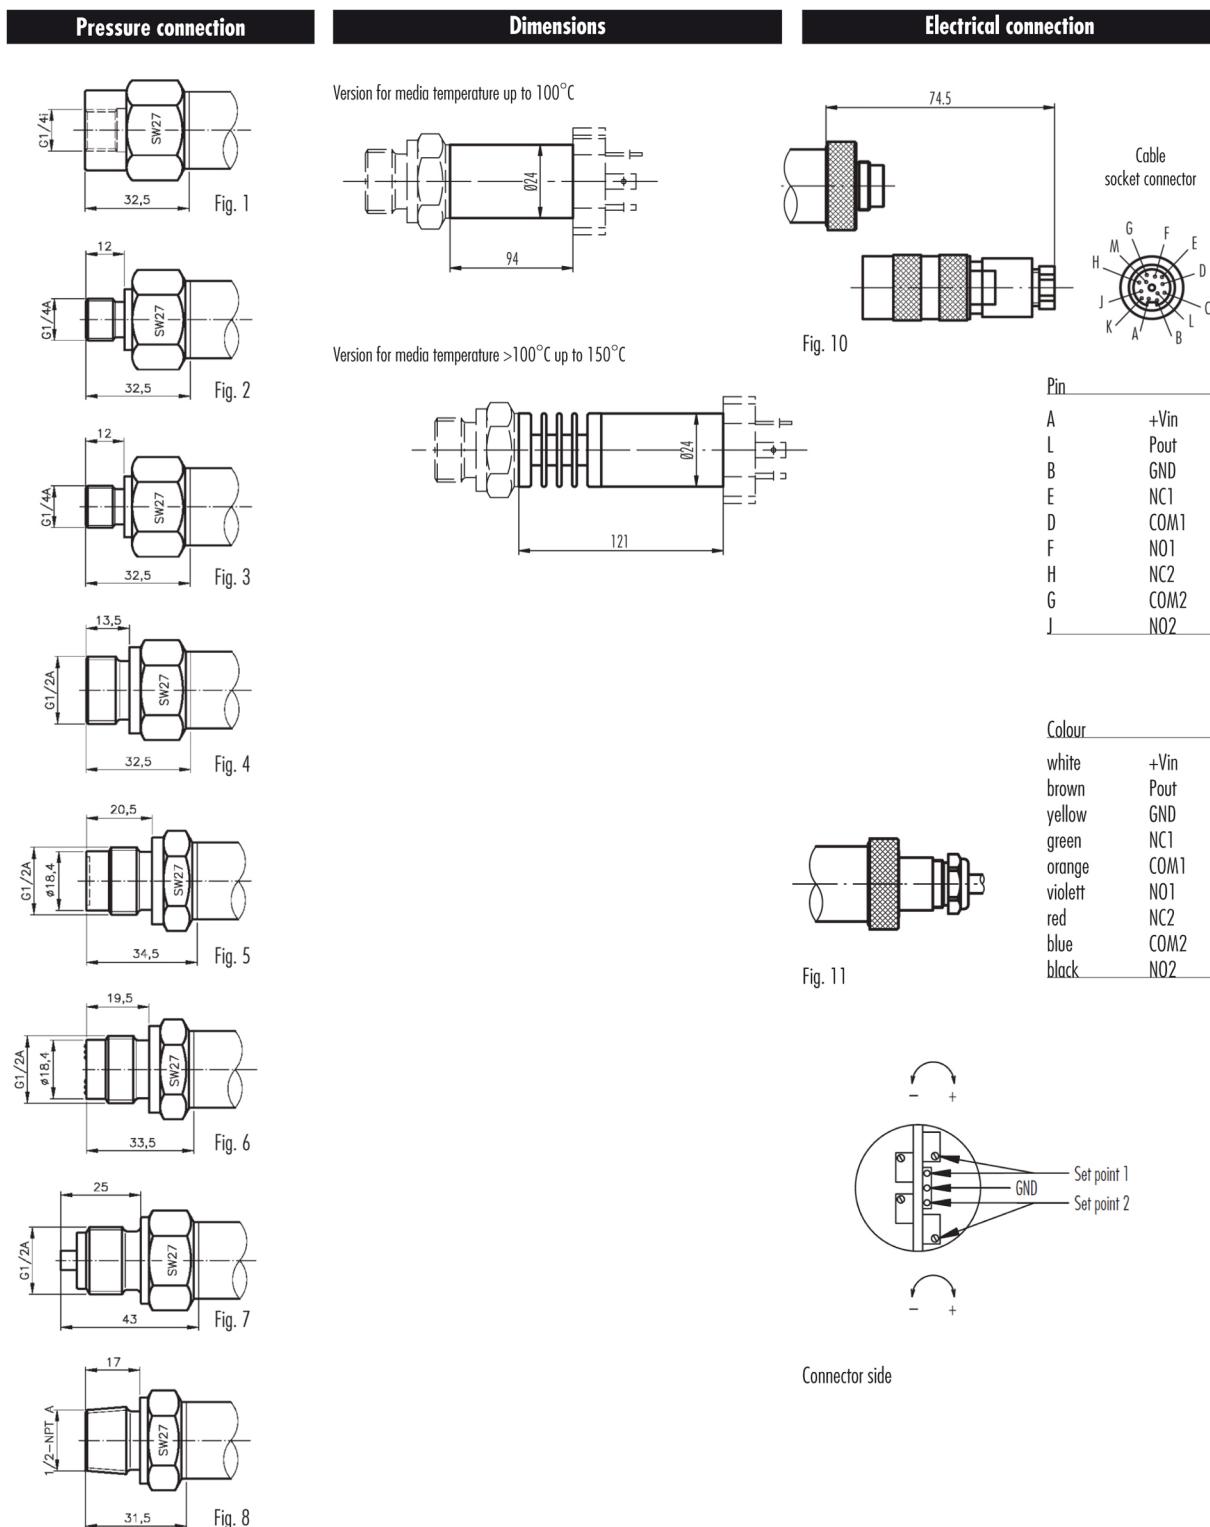

Specifications may change without notice.

STS Headquarters, Switzerland:

STS Sensor Technik Sirmach AG
Rüthofstrasse 8, 8370 Sirmach, Switzerland
sales@stssensors.com | www.stssensors.com

STS France:

STS France
844 Route de la Caille, 74350 Allonzier la Caille, France
info-fr@stssensors.com | www.stssensors.fr

STS Germany:

STS Sensoren Transmitter Systeme GmbH
Poststrasse 7, 71063 Sindelfingen, Germany
info-de@stssensors.com | www.stssensors.de

STS Great Britain:

STS Great Britain Ltd.
Higham Dairy Farm, Bumhill Lane, Alfreton | Derbyshire | Great Britain, DE55 6AH
contact@stssensors.com | www.stssensors.co.uk

STS Italy:

STS Italia s.r.l.
Via Gesù 5, 20090 Opera (Milano), Italy
info-italia@stssensors.com | www.stssensors.it